




## FLEXICOMPACT POWER SYSTEM

### PWSENAFLEXICOMPACT

**enatel**  
energy

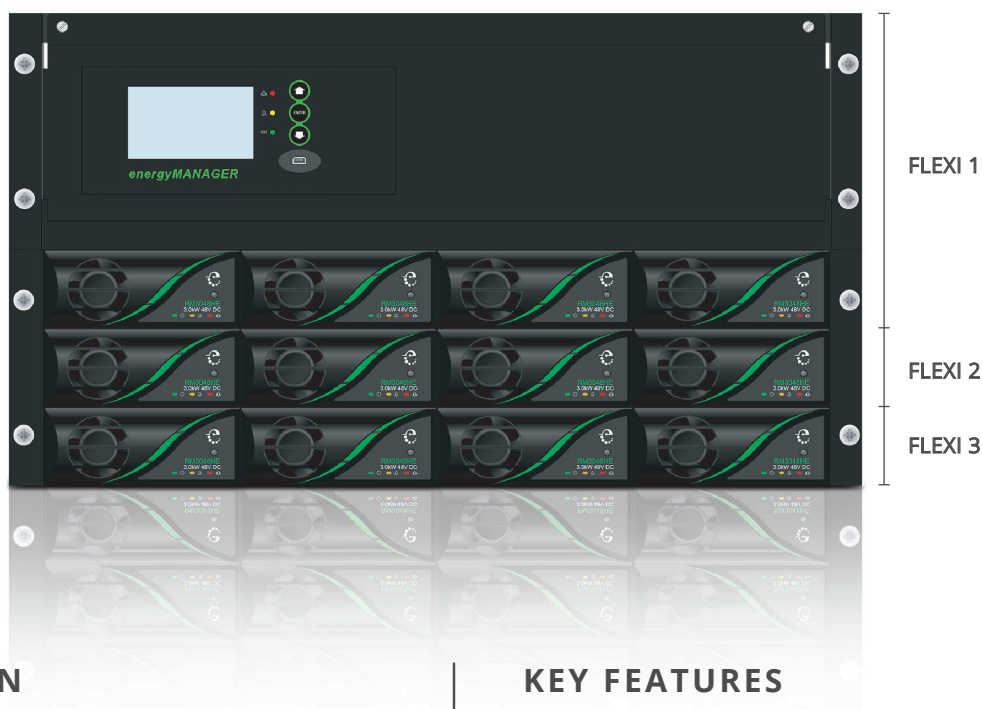

### DESCRIPTION

We offer a range of reliable, compact, efficient and flexible DC power solutions from small standalone systems for applications like access nodes to medium sized systems for radio base stations.

The flexiCOMPACT range offers configured solutions using Enatel's state-of-the-art high-efficiency switch-mode rectifier modules and intelligent network capable controllers. They include an integral AC and DC distribution with flexible combinations of MCBs and LVD options. These can be configured to meet a wide range of customer requirements for access power solutions.

Modules are New Zealand-made to guarantee design, manufacture and process integrity. Our robust, proven conversion topology utilizes only the highest specification components – something rarely offered by others.

### KEY FEATURES

- World-leading power density.
- Fully featured telecom-grade rectifiers.
- Modular 19" expandable design.
- Front access design.
- Flexible AC input, DC output and battery interfaces.

### TYPICAL APPLICATIONS INCLUDE

- (CPE) Customer premises equipment.
- Roadside terminals.
- Converged VoIP/data networks.
- Wireless, fiber and fixed line communication networks.

# FLEXICOMPACT POWER SYSTEM

## PWSENAFLEXICOMPACT



The flexiCOMPACT series are front-connect advanced power systems with a friction-hinged panel-mounted monitor for ease of install/commission.

The flexiCOMPACT is populated with high-efficiency on-line replaceable rectifiers in combination with intelligent energy management software to provide a highly reliable DC power solution delivering significantly reduced operational costs. FlexiCOMPACTs are a truly scalable power system with a building block philosophy to support both delivery and final point definition benefits. The modular construction includes a 3U distribution chassis and expandable 1U power-shelves.

It is fully busbar-based for increased reliability, performance and quality. The flexiCOMPACT system forms the basis for SYNERGi, a solution which can be tailored for hybrid applications or made solar-ready, allowing renewable inputs to be intuitively optimized.

## SPECIFICATIONS

ELECTRICAL (See rectifier datasheet)	
AC Input	Single phase, three phase 220V ph-ph and 400V ph-ph + N (refer to rectifier specification for full details)
DC Output	Nominal voltage: 48V DC (contact Enatel for other voltage options)
CONFIGURATION OPTIONS (See CTO Guide for complete configure-to-order information)	
The FlexiCOMPACT range allows for easy system upgrades either supplied pre-configured to the customer's requirements or as on expansion to meet evolving requirements.	
CTO (CONFIGURED TO ORDER) OPTIONS	
AC input MCB with surge protection device, type 2	
2 or 4 x DIN style 27mm battery MCBs	
Max of 15 x DIN style 18mm load MCBs (max 12 when fitted with 4 battery breakers)	
Low voltage battery disconnect (LVBD) and low voltage load disconnect (LVLD) options	
ETO (ENGINEERED TO ORDER) OPTIONS	
Customized designs available as required	
MECHANICAL	
Dimensions (W, H, D)	Flexi 1: 483mm (19"), 177.8mm, 380mm
	Flexi 2: 483mm (19"), 222.2mm, 380mm
	Flexi 3: 483mm (19"), 266.7mm, 380mm
Weight	Flexi 1: 13.0kg, Flexi 2: 18.0kg, Flexi 3: 23.0kg
COMPLIANCES	
Safety	EN60950
Other	CE & RoHS compliant

Latpower reserves the right to change product specifications and design without notice.

3003-N-1020